




1 × eVic USB cable * 1 × eVic wall adaptor * 1 × eVic manual * 1 × MVR manual





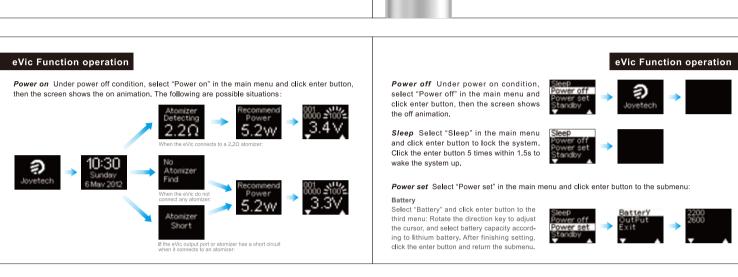

Select "Output" and click enter button to the third menu:
Rotate right the direction key to adjust the cursor, and select tens, units, decimals digit; rotate left the direction key to adjust output power. The default power is 5.2W, the range of output power is from 2W to 15W. After finishing setting, click the enter button

and return the submenu. At this time, output voltage will be adjusted automatically according to your setting.

Of course, you still can select your favorite

voltage in the condition of work menu







Select "Exit" and click enter button and return the main menu.

eVic Function operation

Standby Select "Standby" in the main menu and click enter button to the submenu

Select "Screen" and click enter button to the third menu: Rotate right or left the direction key to adjust the cursor, and select the delayed time of screen you want to set. After finishing setting, click the enter button and return the submenu.

Select "System" and click enter button to the third menu: Rotate right or left the direction key to adjust the cursor, and select the standby time of system you want to set. After finishing setting,

click the enter button and return the submenu.





Select "Exit" and click enter button and return the main menu.

eVic Function operation

Calendar Select "Calendar" in the main menu and click enter button to the submenu

Show Time Select "show time" and click enter button to

show the current time, then click the enter button and return the submenu.









Select "Set Year" and click enter button to the

enter button and return the submenu.

add 1, Rotate left and hold on to add the number

continuously. After finishing setting date, click the





eVic Function operation

eVic Function operation



Set Time

Select "Set Time" and click enter button to the third menu: Rotate right the direction key to adjust the cursor and select the hour or minutes; rotate left the direction key to adjust the hours or minutes. Rotate left one time to add 1, rotate left and hold on to add the number continuously. After finishing setting time, click the enter button and return the submenu.







0000000

1.0

third menu: Rotate right the direction key to minus 1, rotate left the direction key to add 1. After finishing setting year, click the enter buttor and return the submenu.



Select "Set Date" and click enter button to the third menu: Rotate right the direction key to adjust the cursor,

and select the month or date; rotate left the direction key to adjust the month or date. Rotate left one time to





Set Date

Select "Exit" and click enter button and return the main menu.

eVic Function operation

Puff Info Select "Puff Info" in the main menu and click enter button to the submenu:

Select "Set Puff" and click enter button to the third menu: Rotate right the direction key to adjust the cursor,

and select thousands, hundreds, tens, units digit; rotate left the direction key to adjust. Rotate left one time to add 1, Rotate left and hold on to add the number continuously. You can set the numbers to limit your puffs.

When setting "0000", it means that puff number is unlimited. After finishing setting puff, click the enter button and return the submenu.

Reset Puff


Select "Reset Puff" and click enter button to the third menu: The current screen shows "000". Click enter button to reset puff and return the submenu.

Select "total Puff" and click enter button to show the total puff, then click the enter button and return the submenu.

0300000 630000

Device Select "Device" in the main menu and click enter button to the submenu:

and return the subr



eVic Function operation

Select "User info" and click enter button to show the user info: The user info is written into battery through the application software of PC port (refer to the application software operating instructions). Then click the enter button and

Select "Series No" and click enter button to show the series number of this device, then click the

Select "Version" and click enter button to show the version of this device, then click the enter button and return the submenu.


Select "Exit" and click enter button and return the main menu

Function of work menu

Select "Power on" and the eVic will start up.

enter button and return the submenu.

The screen will be blank after finishing animation and then click enter button; the screen will appear the following frame.



Project	Function
A	The current puff number
В	The rest of puff number under the current output voltage and atomizer
С	The current battery output voltage
D	Decrease the battery output voltage (with 0.1V decrease progressively, the minimum is 3.0V)
Е	Increase the battery output voltage (with 0.1V increase progressively, the maximum is 5.0V)
F	The percentage of lithium battery remaining power (with 1% decrease progressively)
G	Battery power symbol
н	High temperature warning sign (when eVic temperature reaches 35°C, the thermometer sign will appear and flash on screen; it shows the device is overheating

Lithium-ion battery introduction Model: SAMSUNG 18650

* If the battery leaks and electrolyte gets in your eyes, do not rub them, Instead, rinse them with clean running water and

"If the battery leaks and electrolyte gets in your eyes, do not rub them. Instead, rinse them with clean running water and immediately seek medical attention. If left as is, electrolyte can cause eye injury.

* Do not use or store the battery where is exposed to extremely hot, such as under window of a car in direct sunlight. Otherwise, the battery may be overheated. This can also reduce battery performance and shorten service life.

* Do not use the battery if it gives off an odor, generates heat, becomes discolved or deformed, or appears abnormal in any way. If the battery is in use or being recharged, remove it from the device or charger immediately and discontinue use.

* Do not use the battery in combination with primary batteries (such as dry-cell batteries) or batteries of different capacity types or trand

*Do not use the battery in combination with primary batteries (such as dry-cell batteries) or batteries of different capacity, type or brand.

*Do not strike, throw or subject the battery to sever physical shock.

*Do not pierce the battery housing with a nail or other sharp object, break it open with a hammer, or step on it.

*Do not immerse the battery in water or allow it to get wet.

*Do not immerse the battery in water or allow it to get wet.

*To hook of the guarantee charging security, please don't take out lithium battery charging.

*Keep the batteries in a separate place and don't let them mix with metal objects.

*Remove the lithium-ion battery from the e-digarette if you plan to store it for long periods of time.


*Store the eVic battery at room temperature. The eVic battery is a lithium-ion battery and will need to be replaced periodically. Read charging instructions before using.

*Do not short-circuit the battery by connecting wires or other metal objects to the positive (+) and negative (-) terminals, or reverse the positive (-) and negative (-) terminals.

*Over-discharging: It should be noted that the cell would be an over-discharged state by its self-discharge characteristics in case the cell is not used for long time. Over-discharging may causes loss of cell performance, characteristics, or battery functions. In order to prevent over-discharging, the cell shall be charged periodically to maintain between 3.7V and 3.9V.

Charging eVic

To charging eVic, plug the dedicated USB charging cable into the charging port of the eVic. It takes approximately 3 hours to charge via a dedicated USB charging cable provided to you. Please allow the battery enough time to be fully charged.

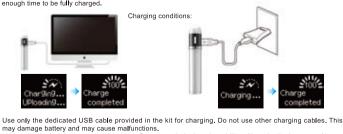

may damage battery and may cause malfunctions.

Lithium ion battery is an expendable item. Over time, their changing ability will gradually decrease. Always fully charge your battery to maximize its lifespan.

Use a high-power USB port on your computer to charge the eVic. Low power USB port will not charge the eVic.

How to vapor

When you connect atomizer normally, and then press enter button long, the atomizer will work. At the same time, when you normal vapor, the screen will show the time of vapor. When you loosen button, the screen will be blank after keeping 5s.But if you click enter button and hold on during 5s, the atomizer will work and time again.

A, If the connective atomizer has short circuit or output appears short circuit, and then you click enter buttor A, if the connective atomizer has some circuit of output appears snort circuit, and then you click enter button and hold on, the battery will not output and appear a latern screen.

B, If the connective atomizer has open circuit or the atomizer without connection, and then you click enter the connective atomizer has open circuit or the atomizer without connection, and then you click enter the connective atomizer has open circuit or the atomizer without connection, and then you click enter the connection of the

button, the battery will not output and appear alarm screen. C, In order to protect atomizer and battery, the battery will enter into working overtime protection when it keeps working over 10s.

D, When the battery energy is below 5%, low voltage warning shows up during vaporing; when the battery

2.2S

Precautions Be sure to read the instructions and precautions before using the product. This will help insure easier and safer use.

1. Don't abuse your eVic even though it's made of metal you can damage it by dropping it.

2. Only have your eVic repaired by Joyetech. Don't attempt to repair the unit yourself as damage or personal injury can occur.

3. Do not remove the circuit board housing from behind the front cap. Doing so will void your warranty.

4. The eVic operates on a single lithium-ion battery. Never stack two batteries or use batteries that are not recom-

mended for use in the eVic. This is very dangerous to use magnets on your batteries. 5. In order to guarantee the normal work of eVic and the effect of smoking, we suggest that you should charge in time when the battery power below 10%.

6. In order to prolong the validity of eVic, please do not place it in too hot or too cold environment.

7. Please obey local laws or regulations while vaporing with electronic cigarettes. If there are any bans or potential dangers, please keep the battery locked.

8. eVic is not waterproof, so please keep it dry. It may cause its components damaged or electric shocks if you touch it with wet hands.

90. Keep your eVic away from sources of excessive heat.

10. Please use only Joyetech's dedicated accessories and batteries, and keep it away form children.

11. Please use only Joyetech's dedicated software to modify programs and parameters of eVic.

12. Do not drop, hit or beat eVic, or you may cause damage to outer shell or inner components.

Please consult with Joyetech distributors for their warranty and return policy. We are not responsible for the defects caused by human error. Joyetech' s warranty does not apply to products purchased through third party vendors.